

## Tyseley Carriage Sidings



Across the tracks from Platform Four at Tyseley Station are the Carriage Sidings with the modernised (but substantially original) single storey building, which after over hundred years still houses the facilities for the coach cleaning staff. At the start of the 20<sup>th</sup> century the Great Western Railway were planning to quadruple their main line through Birmingham, from Handsworth Junction to Olton. The widening of the permanent way would require the relocation of the existing Locomotive Shed and Carriage Sidings at Bordesley, so in 1903 sixty acres of land at Small Heath was purchased for £22,000. The land was locally known as Proof House, probably reflecting the use of the adjacent property as a firing range by the nearby Birmingham Small Arms (BSA) works.

*Great Western Railway.*  
*Office of Superintendant of the Line.*  
*Paddington Station.*  
*London, W.*

L.637.  
 B.20.  
 February 18th 1903.

Dear Sir,

BORDSLEY AND OLTON WIDENING.  
 PROPOSED ENGINE SHED AND CARRIAGE SIDINGS AT SMALL HEATH.

With reference to previous correspondence on this subject, I have now received the amended plan from Mr Churchward showing how in his opinion the proposed Engine and Carriage Sheds can be provided at Small Heath, utilising practically the whole of the available land, and the maximum accommodation that can be given on the land proposed to be utilised.

I shall be obliged if you will carefully consider the plan, and let me have it back with any suggestions you may have to make, bearing in mind that to commence with I do not propose to ask for accommodation to be provided for more than about 250 Carriages, and I will ask you after allowing for say from 150 to 200 Carriages in the Shed, and the balance outside, to mark ~~such~~ the Sidings as need not be provided to commence with.

Although for some reasons it is convenient to be able to get from Sidings at both ends, and this plan is undoubtedly desirable so far as the Sidings in the Carriage Shed ~~and~~ concerned, I am very doubtful whether, in the case of the Sidings in which the Excursion Carriages will for instance be stored, <sup>if would not be better</sup> for at any rate a proportion of them to be constructed as Dead End Sidings, in which Carriages once placed could stand safely without risk of being pushed foul of adjoining lines. I shall be glad if you will consider this point carefully.

It is obvious that at the Tyseley end

a good deal of otherwise waste space can be utilised, and more accommodation could be given at less expense if say the four Sidings nearest to the Carriage Shed were constructed as Dead Ends.

So far as the general arrangement is concerned it seems to me to work out very satisfactorily.

Please reply as early as possible as it is very desirable no unnecessary time should be lost in putting the matter forward.

Yours truly,  
*(Signed)* *J. Collier*  
*per M.P.*

E. Murphy Esq.  
 Plan Booked.


Great Western Railway correspondence from Mr Allen (Superintendent of the Line at Paddington) to Mr E Murphy (Birmingham Divisional Superintendent based at Snow Hill station) regarding the layout of the new facilities showed that the plans for the development were well advanced. The attached internal letter identifies that the initial arrangement of the Carriage Shed and Sidings was designed to accommodate more than 250 carriages, of which, 150 to 200 carriages would be stored undercover in a shed. It is worth noting that carriages in use at this time were typically only forty feet long (being six and four wheeled designs). The letter also suggests that installing a proportion of dead-end sidings instead of through sidings would save some costs.

The new Carriage Sidings were completed at the end of 1908 and in the January 1909 issue of the Great Western Railway Magazine (Vol XXI No1) the following photograph and short article appeared:-




***New Carriage Shed at Tyseley*** – The large new carriage shed adjoining Tyseley station has a length of 600 feet and a height to eaves of roof of 17 feet 6 inches. Its present width is 59 feet, four lines being accommodated. Special provision has been made in the building to admit of its being enlarged when required in the future. With this in view, while a brick wall is built on the side facing the main line, the opposite side, where the extension will be effected, is constructed with a steel frame closed in with the 'Universal Sheeting' manufactured by Messrs Samuel Taylor & Co of Birmingham. This material, in addition to giving a pleasant appearance (an important point with so large a structure), has the advantage over corrugated iron that it may be readily taken down for use elsewhere without injury. The sheeting is used in the roof, which is partially glazed, and at the gable ends also.




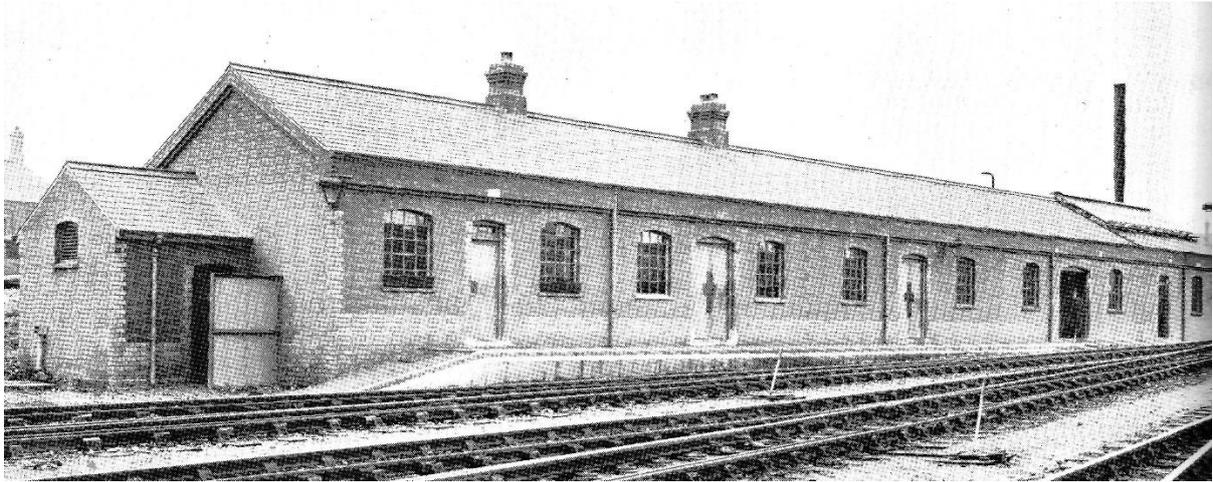

The single storey red brick building with gable end pitched slate roof at the station end of the carriage sidings housed the Carriage & Wagon Department's staff facilities (toilets and mess room). In addition the building contained a Workshop, Storeroom, Engine Room and Boiler House. The boiler powered a static vacuum cleaning plant located in the Engine Room.

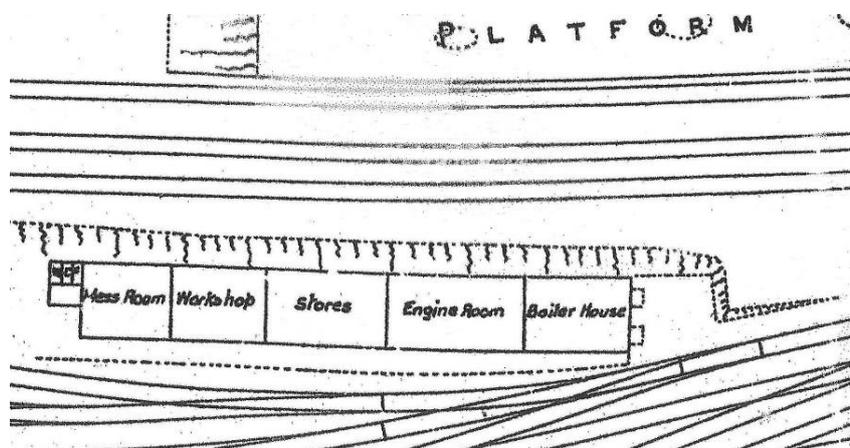

This photograph of the vacuum cleaning plant at Tyseley was taken on 4<sup>th</sup> December 1912. It shows a belt driven suction pump and a number of associated storage tanks. At this time the vacuum cleaner was in its infancy and those institutions with large requirements like Hotels, Theatres, Department Stores, Hospitals, Barracks and Railway Companies had static arrangements like this, from which rigid and flexible pipes were taken to the point of work. The principle manufacturer of vacuum cleaning equipment in the UK, was the British Vacuum Cleaning Company, which had been incorporated in 1903 having been established the previous year by Hubert Booth. He had patented an invention for the cleaning of carpets and other articles by suction caused by the creation of a vacuum in 1901.

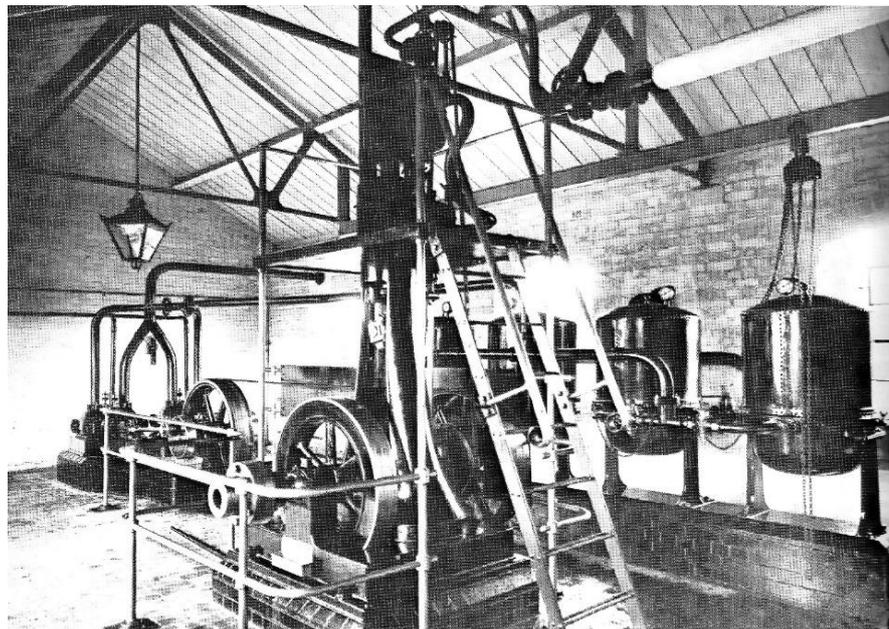


## Operations at Tyseley Carriage Sidings

This extract from Great Western Railway Appendix to the Service Timetable for Birmingham Division (Sections No.13 & No.15) is dated March 1929. The plan differs from that in the March 1921 appendix (above) as it shows the three extra dead end sidings (numbered 13, 14 & 15), which were added in 1924.

Incoming down goods trains terminating at Bordesley Junction were accepted in Tyseley Carriage Sidings Nos.7 to 12. This relieved the occupation of the Down Goods Line and avoided congestion at busy times. The train's locomotive could also be released and sent to the Loco Shed. When the Down Goods Line was clear, the shunting locomotive employed in the Carriage Sidings would take the goods train forward to Bordesley Junction Yard.

The short siding adjacent to the single storey building (labelled STORES &c on the plan) is believed to be where travelling oil-gas tank wagons (telegraphic code: CORDON) were placed. A network of buried pipes allowed the oil-gas to be distributed

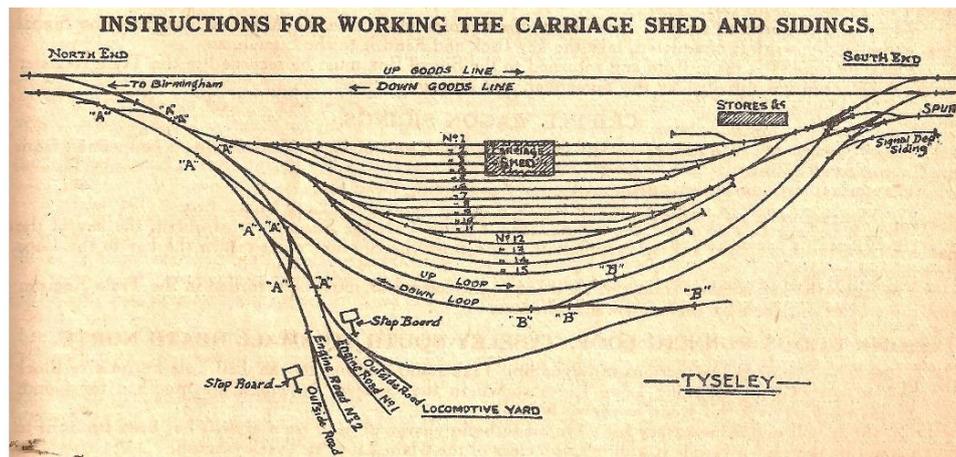

The following instructions must be strictly adhered to, in connection with the movement of Engines and Passenger Stock to and from the Lines and the Engine Depot at Tyseley.

1. A Box, known as Tyseley Loco Box, and Signals worked therefrom is provided. Telephone communication is provided between Tyseley Loco Box and Small Heath South Box.

2. The connections with the Goods Lines at the South end of the Yard are controlled from Tyseley South Signal Box, and the connections (marked "A" on sketch) between the Carriage Sidings and the Locomotive Yard at the North end and the fixed Signals applicable to them are controlled from Tyseley Loco Box.

3. The Sidings are numbered from 1 to 15 as shewn on the diagram, and no Train or Engine must be turned into the Carriage Sidings from the South end without permission from the Shunter on duty, who will be responsible for seeing that everything is clear, and that nothing is allowed to foul the incoming Engine or Train.

No. 7 Siding is allocated for stabling Cripple Coaches.

4. When empty stock trains LEAVE the sidings at the South end, the Shunter must advise the Signalman at Tyseley South Box as each train is ready, and in the case of trains being PROPELLED out of the sidings, the Signalman at Tyseley South Box must on no account lower the signal until he is informed that the train is actually ready to back out.

In the case of Rail Motor Cars or trains with engine leading, the signal may be lowered in the usual way when the Signalman becomes aware from observation or engine whistle what movement is required. (P. 7732.)

5. The Lines marked Up Loop and Down Loop may be used for Engines or Trains running in the proper direction, but every Engineman must be prepared to stop short of any obstruction, and must stop DEAD at the Signal controlling the exit from the Line on which he is running.

6. The Points marked "B" must be clipped and padlocked for the Loop Lines, and must only be used in case of emergency. The keys are to be kept in Tyseley Loco. Box, and when it is necessary to use these Points, a Flagman must be stationed on the ground to protect the operations.

7. Trains of Empty Stock must be disposed of quickly at the North end to clear the Main Lines, and for this purpose the Hand Points must always be set for No. 6 Siding unless a Shunter is present to deal with the Train, when the Engineman will act under the Shunter's instructions.

When no Shunter is at North end of the Carriage Sidings, Trains must draw into No. 6 Siding, and the Engineman must stop clear of the connections at the South end, and be dealt with by the Shunter. No. 6 Siding must always be kept clear for this purpose, and nothing must be put into it from South end.

8. Shunting operations must be performed as far as possible at the South end where a Shunting Spur is available. When formed, Trains for the direction of Birmingham are to be placed in the Sidings in proper order, so that Engines from the Loco. Yard can back on coaches from the North end and leave from there as required.

When shunting has to be performed at the North end, the road must be set for the Departure Line and the Sidings Starting Signal lowered when practicable, but if this cannot be done, Enginemen must not pass the Starting Signal at danger so as to foul the Incoming Road without the permission of the Signalman, who must not give this permission if anything is approaching on the Incoming Road.

9. A "Limit of Shunt" Lamp Indicator is provided at Tyseley Carriage Sidings applicable to the Incoming E. & C. Line.

The Indicator, which is lettered "Limit of Shunt" in red letters on white ground, is fixed at an height of 14 feet on the same post as the Incoming Line Home Signals for the Loco. Box.

The Indicator will face Drivers when shunting in the wrong direction over the Incoming E. & C. Line, and the Engine or leading vehicle, as the case may be, must not pass the Indicator. (P. 7536.)

10. Trains from the Sidings at North end have to cross the Incoming Road of Light Engines and Trains, and Trainmen must be specially on the alert when entering or leaving the Yard.

11. Whenever vehicles are required to be placed on any of the Traffic Department Lines at Tyseley Carriage Shed, or are required to be put into either of the Locomotive Department roads, such vehicles must never be gravitated to the respective lines, but must always be placed where required by means of an engine.

12. The engine screw connection must be used when coupling engines to coaches. (Y. 684.)

13. When it is necessary for a Train, or Engine, or Engine and Vehicles to set back in the wrong direction on the Outwards Road from Small Heath South Box to Tyseley Loco. Box, the Signalman at Small Heath South Box must send by telephone to Tyseley Loco. Box the following message:—

"May train, or Engine, or Engine and Vehicles set back in the wrong direction over the Outwards Road?"

The man at Tyseley Loco. Box, before giving this permission, must satisfy himself that the Outwards Road is clear, the Outwards Road signals at danger, and the Crossover Road points in the proper position for the Train, or Engine, or Engine and Vehicles to pass.

In no circumstances must the Signalman at Small Heath South allow anything to set back in the wrong direction on the Outwards Road unless the permission of the man at Tyseley Loco. Box has been obtained, and a Shunter is in attendance to accompany the Train, or Engine, or Engine and Vehicles.

across the site. Flexible hoses were used to connect to the individual carriage oil-gas storage tanks. Another network of pipes distributed water to locations where hydrants could be connected. Manhole covers identified the various connection points.



### **Carriage & Wagon Department**

The Carriage and Wagon Department was part of the Chief Mechanical Engineer's (CME's) Department. The Chief Mechanical Engineer operated from Swindon in Wiltshire, where the Great Western Railway's main manufacturing works had been established. Responsible to the CME was the Chief Outdoor Superintendent, who supervised seven (later increased to nine) Divisional Locomotive, Carriage & Wagon Superintendents,. These were based at various engineering works across the Company. After the Grouping in 1921, the Divisional Superintendents were based at the following locations:


Old Oak Common (London)	Cardiff Valleys & Barry	Wolverhampton
Bristol	Newport	Worcester
Newton Abbot	Neath	Oswestry

Each of these Divisional Superintendents was responsible for the organisation of the running work in their division. This meant providing suitable motive power and rolling stock for all the passenger, freight and engineering services being operated. Arrangements had to be made for; regular overhauls, maintenance, positioning, refuelling, and cleaning of the required locomotives, carriages and special wagons. Footplate staff and shed staff were also their responsibility, including; recruitment, training, progression, organising the rotas, providing welfare facilities, etc. They also had responsibility for the operation and maintenance of mechanical plant through-out the division, including; hydraulic systems, water pumping-engines, storage tanks and distribution pipework, gas and electric apparatus, as well as workshop and shed equipment, from lathes to turntables Their role was to achieve all these tasks in the most economic and efficient manner. Finally the Divisional Superintendents were responsible for recovering and repairing locomotives and rolling stock, which had been involved in accidents or had broken-down on the system.

The Divisional Superintendent at Wolverhampton was responsible for the Midlands and Northern areas, which stretched from Oxford to Birkenhead. He was based at Stafford Road Locomotive Works, near Wolverhampton. The Stafford Road Works were the largest works outside Swindon. They had initially been established by the Shrewsbury & Birmingham Railway. After that company had been absorbed by the Great Western Railway in September 1854, they became the main engineering works for the construction, repair and maintenance of all non-broad gauge locomotives and rolling stock. Following the Great Western Railway's amalgamation with the non-broad gauge West Midlands Railway in August 1863, new construction work was gradually concentrated at the larger Swindon Works. Some locomotive modifications and re-building continued to take place at the Stafford Road Works, but the main activities became the divisional repairs and regular maintenance work.

The post of Divisional Locomotive, Carriage and Wagon Superintendent at Wolverhampton was held in succession by the following gentlemen during the 20<sup>th</sup> century. This information and their photographs appeared in the Great Western Railway Magazine:


Mr James Armstrong Robinson	October 1897	Mr Rupert Hamilton Grey	January 1933
Mr Benjamin Giles	January 1919	Mr VJH Webb	May 1946
Mr Edward Gorden Wainwright	January 1924		

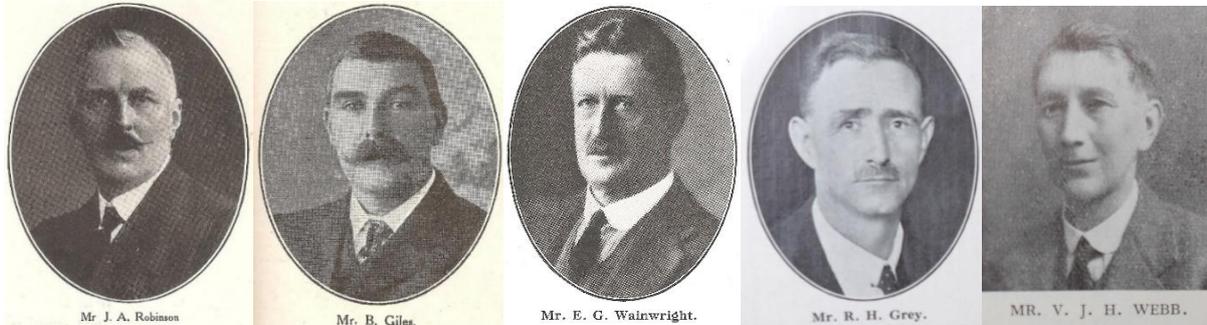

The Wolverhampton Divisional Superintendent had reporting to them; a Works Manager (who was responsible for activities within the Stafford Road Works) and an Assistant Divisional Locomotive, Carriage & Wagon Superintendent (who acted as their deputy and was responsible for all activities outside the Stafford Road Works). Initially these two posts were combined, but from 1905 they became separate posts. The Assistant Divisional Superintendent had the day to day responsibility for the various Locomotive Sheds and Carriage Sidings across the Northern and Midlands area. From 1908 that included the recently constructed Tyseley Carriage Sidings.

The following Assistant Divisional Superintendents at Wolverhampton have been identified from the staff appointments recorded in the Great Western Railway Magazine:

Mr EE Lucy	1897	Mr WE Baines	July 1922
Mr EG Ireland	1904	Mr WN Pellow	July 1924
Mr EG Wainwright	January 1906	Mr VJH Webb	October 1929
Mr JWA Kislingbury	January 1913	Mr RF Wilson	July 1933
Mr ETJ Evans	June 1919	Mr AG Snell	July 1939
Mr HC Rodda	May 1920	Mr WN Griffiths	May 1946

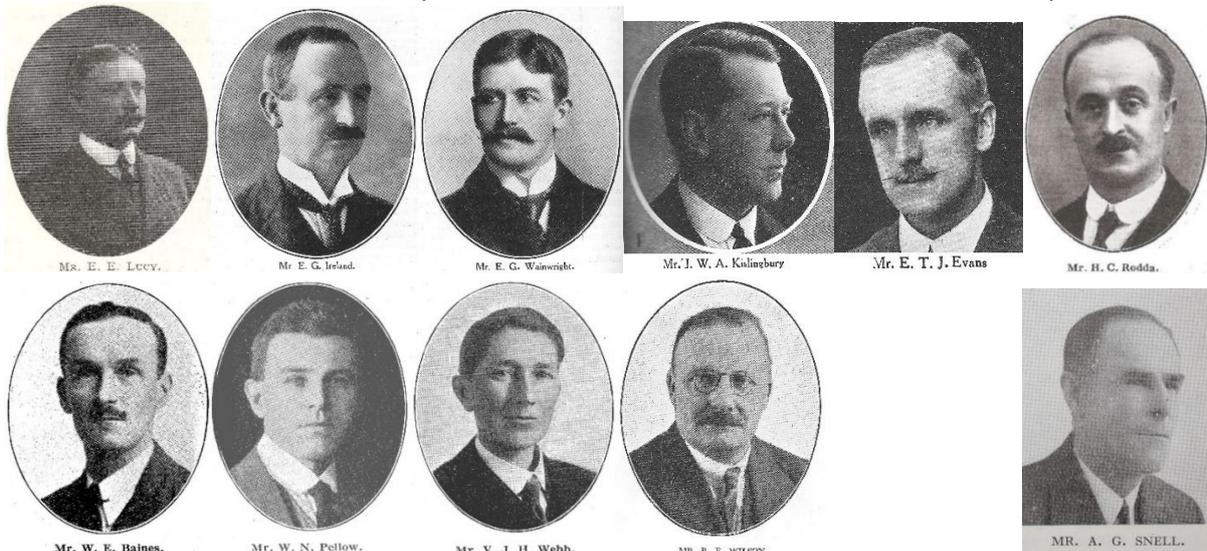


### Staff employed at Tyseley Carriage Sidings

The following table gives the numbers of Carriage & Wagon Department staff allocated to Tyseley in 1924:

Carriage & Wagon Foreman	1
Carriage Cleaning Foreman	1
Clerks	2
Shop Grades (Carpenters, Glazers, Fitters, Electricians, etc.)	22
Carriage & Wagon Examiners	7
Carriage & Wagon Oilers and Greasers	7
Chargeman Carriage Cleaner	1
Carriage Cleaners	48
<b>Total Carriage &amp; Wagon staff (located at Tyseley)</b>	<b>89</b>
Carriage Cleaning staff (out-stationed at Snow Hill Station)	26 (increased to 31 by 1929)
Wagon Repair staff (out-stationed at Bordesley Sidings)	19
Wagon Repair staff (out-stationed at Hockley Goods Depot)	13
<b>Total Carriage &amp; Wagon staff (including out-stationed staff)</b>	<b>147</b>

The Carriage & Wagon Department staff at Tyseley were responsible for all activities associated with keeping the Company's coaching stock fully operational. The majority of the staff at Tyseley were involved in the daily task of keeping the coaches clean, but staff also carried out other duties. These included; storage and marshalling of the coaches into the required train formations, regular inspections, examinations, general maintenance and any required remedial repairs.

Prior to World War 1 the carriage & wagon staff were almost entirely male, but during the two world wars shortages of staff resulted in the recruitment of female workers (especially in the lower skilled jobs such as carriage cleaning). Thus, when built in 1908 the facilities for female staff at Tyseley was very limited, but this was resolved in 1943 by the construction of a staff canteen, which included separate female facilities.

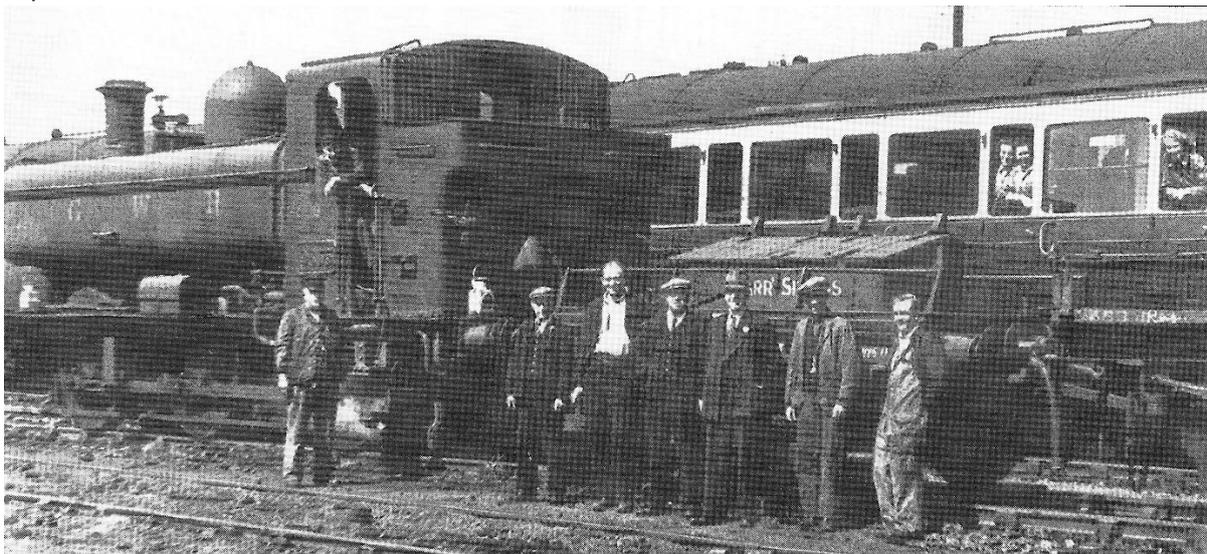

Great Western Railway 0-6-0PT 8750 class pannier tank locomotive No.9635 and the Tyseley carriage sidings shunter's truck form the backdrop for this group of carriage sidings staff and the locomotive crew as they pose for this photograph by P Garland taken in May 1948. In the background some female carriage cleaners lean out of the door drop-light windows of a Collett designed main-line corridor coach. This is the corridor side of the third class compartments.

Pannier tank locomotive No 9635 was built for the Great Western Railway in January 1946 at Swindon Works as part of build lot 355. Another Pannier tank from the same lot, No.9600 is in the Tyseley collection. These locomotives were designed for shunting and light freight duties. The 8750 class was a development of the 57xx class Pannier tank with an improved cab, rectangular spectacles (front windows), plus sliding side shutters and hinged doors to prevent draughts. These pannier tanks had a capacity of 1,200 gallons and the bunker could hold 3 tons, 6 cwt of coal. All were fitted with Automatic Train Control (ATC). On the cab side under the number is a coloured circle with a letter. This indicates the route colour and power group classification. The 'group 20, class PJ' boiler operated at 200 lb and produced a tractive effort at 85% of 22,515 lb - Power Group C. The maximum axle weight was 17 tons, which restricted the class to Main Lines and some Branch Lines – Route Colour Blue, but in 1950 this restriction was relaxed due to their negligible hammer blow and the class was reclassified to operate over Yellow Routes.



Shunter's trucks were specially constructed to enable Shunters to quickly and safely travel within marshalling yards. They had a full length running-board and hand rail on each side to allow men to ride on them. A large tool box was provided to store spare equipment. They were usually permanently allocated to a specific location and this was painted on the side of the tool box (in this case 'CARR SIDINGS'). The shunter's truck in the photograph has angled back handrails and appears to have self-contained buffers with large (one foot, six inch diameter) round heads, which indicates it was constructed to diagram M5. A total of forty-five shunter's trucks were built to this diagram at Swindon works between 1940 and nationalisation at the end of 1948. They were fourteen feet long over the headstocks and had a relatively short, seven foot wheelbase. Those allocated to carriage sidings would have vacuum brakes to assist the shunting locomotive in braking. The vacuum pipework can be seen in the photograph, but in addition a diagonal white line was painted on the middle of the underframe to indicate this.

There is a similar Great Western Railway shunters truck (No.43958) in the Tyseley collection. The Tyseley truck was constructed at Swindon Works in 1899 to an earlier design (diagram M1) under build lot 246 (for fourteen shunter's trucks). It was allocated to the Locomotive Department at Swindon from where it was purchased by the Birmingham Railway Museum and moved to Tyseley in 1979. It has recently been restored by the volunteers at Tyseley.



## Carriage Cleaning

Following the appointment in 1904 of Mr WH Waister as Chief Outdoor Superintendent in the Locomotive, Carriage and Wagon Department, carriage cleaning became the responsibility of the CME. With the exception of a few places (including Paddington and Cheltenham), this task had previously been undertaken by the Traffic Department using porters who had nothing else to do. This had been a most unsatisfactory arrangement and despite the additional cost, the company recognised the advantage of having staff dedicated to this activity and of providing covered facilities for storage of the coaches. Each Division was required to employ a Sub-Inspector specifically responsible for ensuring that standards were maintained.

This extract from the General Appendix to the Book of Rules and Regulations is dated September 1920. These instructions to Carriage Cleaners detail the proper methods to ensure that carriages present a smart appearance outwardly and that interiors shall be scrupulously clean.

Contemporary accounts refer to the removal of rubbish from suburban coach compartments, comprising predominately of; abandoned newspapers, orange peel and empty cigarette packets. Quantities of lost property was also collected.

First class compartments had antimacassars (cloth head backs on the seats) which needed washing and ironing. A weekly stores coach would transport the dirty linen to the laundry at Swindon in exchange for clean and pressed items. Some specialist saloons, open excursion and main line coaches were also stored at Tyseley Carriage Sidings and these had lavatories to clean and refresh. Soap needed to be replenished, while the hand towels would be sent with the other dirty linen to the Swindon laundry. A few restaurant cars associated with the cross-country services to the West Country started from Birmingham, but cleaning and stocking these was the responsibility of the Hotel & Restaurant Department.

### CARRIAGE CLEANING.

The attention of Station Masters, Inspectors, Guards, the Travelling Staff and others is specially directed to the subject of Carriage Cleaning, it being of the utmost importance that the Company's Trains, Motor Cars and Trailers shall at all times present a smart appearance outwardly and that the interiors shall be scrupulously clean.

All concerned are requested to be observant in this matter and to report any instances where a proper standard of cleanliness is not maintained and where there is cause for complaint in regard to the condition of the coaching stock.

At Stations where the Carriage Cleaning is performed by the Traffic Department, Station Masters are reminded that they are responsible for the efficient performance of this duty, and that constant personal supervision is necessary to ensure the proper standard of cleanliness being maintained.

Carriage cleaners must not walk through Restaurant Cars for the purpose of getting from one vehicle to another in the performance of their duties.

**Instructions to Carriage Cleaners.**—In order to avoid any misunderstanding on the part of Carriage Cleaners as to the proper method to be adopted in cleaning Carriages, the following instructions are issued for their guidance.

#### 1.—INSIDES OF CARRIAGES.

The insides must first be dealt with in the following manner:—

(a) The rugs and cushions must be removed in every case. The rugs must be shaken and the cushions brushed outside the compartment, and if the cushions require beating, the work must be done sufficiently far away from the carriages to prevent the dust entering the compartments. The backs of each cushioned compartment must also be well brushed.

(b) The compartment must then be swept, particular attention being given to that portion of flooring under the seats, and to the seats under the cushions. The floor-cloth in all first class compartments must be washed with house-flannel and water; the lavatory pans, basins, metal fittings and floors must also be thoroughly cleansed and all metal fittings polished.

(c) The windows, lamp globes and reflectors must also be well cleaned and polished.

(d) When the compartment has been swept, the rug and cushions replaced, and time has been allowed for the dust to settle, the dusting of the compartment must be proceeded with, for which purpose hand brushes and dusters are provided. This duty must be thoroughly performed, attention being given to the cushions, arm-rests, window-ledges, racks, ventilators, panels and every part of the interior where dust is likely to accumulate.

#### 2.—OUTSIDES OF CARRIAGES.

The outsides of Carriages must be cleaned with a special preparation supplied from Swindon, and no other must be used.

Any carriages which cannot be properly cleaned by the usual men after these instructions have been carried out, should be sent to the nearest Carriage Repairing Depot where the Carriage Department Staff will attend to them; and all vehicles sent in for repair will be thoroughly cleaned before they leave the shops.

(a) The first duty of the men appointed to clean the outsides of carriages is to see that the doors, windows, and ventilators of every compartment which is about to be cleaned are properly closed.

(b) After the panels and windows of the carriages have been attended to, the brass work must be cleaned and polished with pumice powder and water, or other authorised preparations, applied with a handful of waste and polished with a dry leather.

(c) The buffers and buffer rods must also be cleaned by using an oil strap with fine sand, or by rubbing the rods with oily waste. The screw connections must also be regularly cleaned and oiled.

Every vehicle must be cleaned before it commences its first journey in the day; and when it makes more than one trip in the day it must be swept out and dusted before it commences its subsequent trips if it be practicable to do so.

The windows and ventilators of all empty carriages standing in sidings or Carriage Sheds must be closed.

All articles belonging to the Refreshment Department found during cleaning operations must be collected and forwarded to the recognised depot without delay. On account of the large amount of crockery broken, attention is directed to the necessity of carefully handling all such articles.

Coaches with lavatory facilities required the roof-top water tanks to be filled. On early coach stock, footplates at each end of the coach gave access to the roof from where a hose pipe would be used to fill the tanks. Later fixed filling pipes were incorporated into the coach structure to allow hoses to be connected at a lower level. The attached weekly Timesheet (dated November 1937) from a Birmingham Carriage Cleaner indicates that about a quarter of their working day was spent 'Towelling Lavatories'.

1937—Week ending Nov. 27—G.W.R. (4263)

G.W.R. Carr. & Wagon Dept. Time Return, A 1. The No. 472 Name W. Perkins

BIRMINGHAM, W.B. 17th 1937 Grade Carriage Cleaner

Charge	No. of Hours worked							Hours worked	For (System Use)				Charge	No.
	Sun.	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.		O.T. Allow.	Exchd. Rate	Amount			
Carriage Repairs												Carriage Repairs		
Wagon Repairs, Traffic												Wagon Repairs, Traffic		
Freighters' Wagon Repairs												Freighters' W.G.		
Taxes, Dept.												Leads Dept. W.G.		
Fine												Eng. Dept. W.G.		
Examining Carriages												Examining Cars		
Wagons												Wagon		
Oiling Carriages												Oiling Carts		
and Greasing Wagons												Orig. & Greasing Wagon		
Greasing Coaches												Greasing Coaches		
Carr. Cleaning (Day work)	6	6	6	6	6	6	6	36				Carr. Cleaning		
O.T. & Gas Apparatus												C.C. Gas Apparatus		
W. Work												Time work		
Initials of Foreman								TOTAL						
Signed W. Perkins												BALANCE		

The staff would also ensure carriage information and warning notices were legible, replacing these where necessary. Any faded, damaged or out-of-date advertising would also be removed and replaced. When requested by the Traffic Department seat reservation tickets would be placed. Examination and replacement of the emergency fire appliances, tool cases and first aid outfits on coaching stock was identified in the General Appendix as being the specific responsibility of the carriage cleaning charginan. The Board of Trade had criticised several railway companies during accident investigations for not having adequate procedures in place to ensure this equipment was in good condition and readily available.

### Carriage Inspections and Examinations

Issued in January 1920 the attached extract gives guidance regarding the items on each coach that required examination by Tyseley's train examiners and greasers.

GREAT WESTERN RAILWAY. 4

**REGULATIONS**  
FOR THE GUIDANCE  
OF  
**TRAIN EXAMINERS AND GREASERS.**

**Examination of Vehicles at Terminal and Stopping Stations.**

1.—It is the duty of Carriage and Wagon Examiners to ascertain that every vehicle is in good and safe running condition on its commencing its journey from their Station, and they must see that the wheels, axle-boxes, springs, buffing and drawgear, the brakes and all other working parts, also the locks, door-handles, windows, and inside fittings of all coaching stock are in good order.

2.—The Examiner must see that the tyres are in good condition and tight, not only by tapping them with the hammer, but by carefully looking all round them, and must notice whether or not the wheels have become shifted or slack on the axles.

3.—The bosses, bolts and bonding strips of the wood disc wheels must have particular attention paid to them, and if any sign of looseness appears, the vehicles must be stopped for repairs.

4.—The bearing-springs, spring shackles and shackle bolts, axle-guards and couplings must receive sufficient attention to ensure their being all sound, and in their right position.  
Attention must also be given to the passenger communication apparatus, automatic brake, hose couplings, cylinders, valves, pistons, and also brake-blocks, which must be adjusted when required.

5.—Attention must be given to the steam heating apparatus, including hose couplings, pipes, heaters, regulators, steam traps, and steam valves.

6.—Every axle-box must be carefully examined by the Examiner, and the grease holes, when necessary, opened with a pricker to ensure that there is proper lubrication, that the brass is of sufficient thickness, and that it is in its proper place in the axle-box; and he must see that the box is properly filled with grease, and use every means to prevent grit and dirt getting in. This Company's oil axle-boxes must be kept clean and sufficiently supplied with oil, and the necessary attention given to pads and packing.  
The Greasers will act under the Examiners, who will be held responsible for the proper greasing and oiling, as well as the examination of the trains.


These examinations and inspections would identify defects, which required more intrusive maintenance or remedial repairs. To resolve any minor defects various 'Shop-grade' staff were allocated to the Carriage Sidings including; fitters, carpenters, and painters. Major defects would be dealt with at the Carriage & Wagon Works at either Wolverhampton or Swindon. The type of work undertaken in the Carriage Sidings would include:

- Stripping out and repairing (or replacing) door locks
- Re-glazing damaged or broken windows
- Repairing minor damage to; woodwork, doors, and window casements
- Repairing the operating mechanism of; blinds, opening windows, gangway connections, etc
- Replacing worn brake-blocks
- Dismantling and reassembling vacuum brake and emergency communication systems
- Replacing damaged; brake and steam heating hoses, couplings, buffers, and axle boxes

### Steam Heating maintenance and preparation

During the winter, railway companies had initially provided the option for individual passengers to hire 'Foot Warmers'. These would be filled with boiling water at the start of the journey. By the turn of the century, an improved heating system using radiators under the seats had been introduced. A two inch (52mm) diameter steam pipe beneath each carriage carried live steam from the locomotive's boiler. At each end of the coach a rubber hose provided a flexible connections to the adjacent coach. This was protected by a stop cock, which when operated also ventilated the hose allowing safe disconnection. Under each coach, at the lowest point, there was an automatic trap which removed condensation from the steam pipe. In each compartment a regulator allowed the Guard to control the flow of the steam to the radiators. The instructions were to maintain a temperature of 55°F (12.8°C).

Fitters at the Carriage Sidings were responsible for draining the steam heating system when required and would repair or replace any damaged / leaking fittings or pipework. They would also test and calibrate automatic traps.

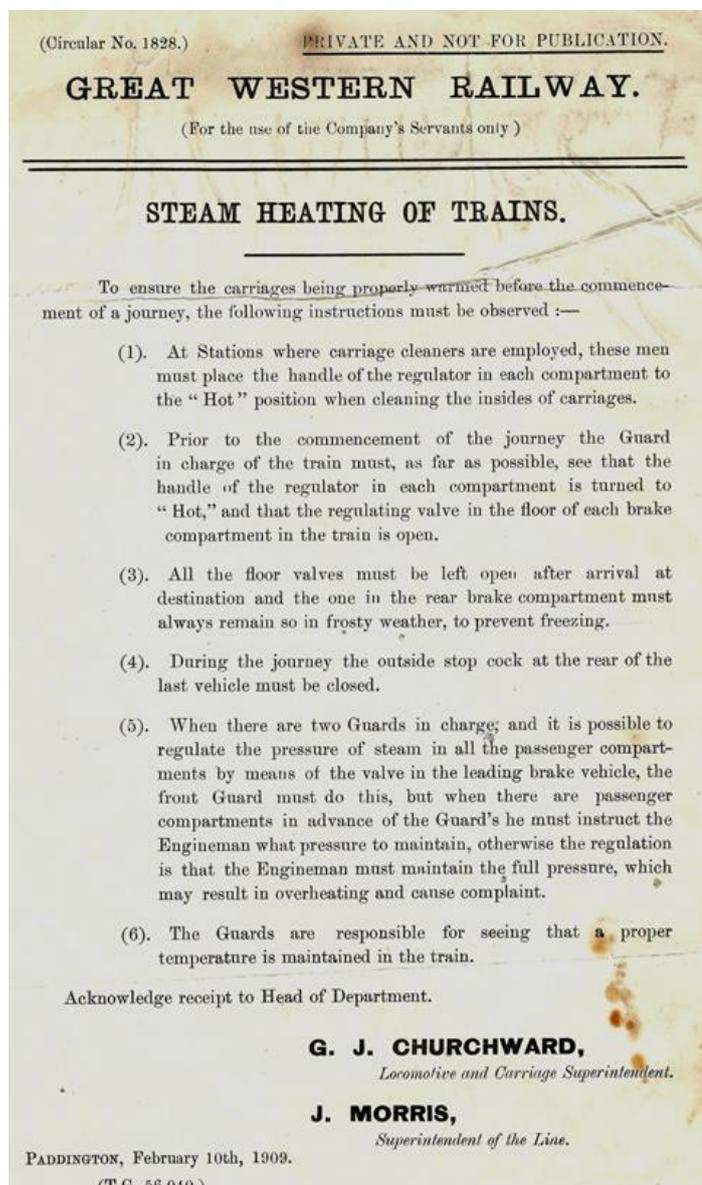

In winter, when requested by the Traffic Department, steam heating systems would be preheated by the Carriage Cleaners prior to dispatching the coaches from the carriage sidings (see circular).

## Carriage Lighting inspection and maintenance

The inspection and maintenance of carriage lighting systems was another specialist area. The 'Shop-grade' staff at the carriage sidings would have also included both gas fitters and electricians as several different lighting systems were in use. An appendix describing the development of carriage lighting systems has been included at the end of this document to give a basic understanding of the various systems employed.

### a) Oil-gas lighting systems required the following daily activities:

- Visual inspection of pipework for damage
- Confirmation of correct operation of regulator and all valves and gauges
- Refilling of the pressurised oil-gas reservoir tanks under the coach
- Inspection of gas mantles (and replacement when required)
- Lighting of pilot lights
- Cleaning of residue from all lamp globes

### b) Electric lighting systems

- Operation was tested before every journey and if necessary light bulbs replaced
- Visual examination of:
  - Dynamo belts - check tightness and for damage
  - Connection leads between coaches
  - Accumulator cells – check electrolyte level and plate condition

Voltage and specific gravity measurements were recommended monthly on each accumulator cell in the batteries. The cells may require; cleaning, topping-up with distilled water or sulphuric acid and re-charging. P&E/EPs were one of the main suppliers of accumulator cells and issued the following inspection and maintenance instructions:

ACCUMULATORS P&E EPs	TRAIN LIGHTING CELLS.	ACCUMULATORS P&E EPs																
<b>TRAIN LIGHTING CELLS.</b>	<b>General Instructions—continued.</b>	<b>General Instructions—continued.</b>																
<b>GENERAL WORKING AND OVERHAULING INSTRUCTIONS.</b>	<p><b>Effect of Temperature on Specific Gravity of Acid.</b> The figures for specific gravity given in these instructions are for acid at a temperature of 60 deg. Fahr. If the actual temperature of the acid is lower or higher than this, the reading as shown by the hydrometer must be diminished by 1 for every 3 degrees Fahr. below 60 degrees and increased by 1 for every 3 degrees above 60 degrees: thus, if the specific gravity as shown by the hydrometer is 1215 and the temperature of the acid 45 deg. Fahr., the correct specific gravity would be 1210, or if the specific gravity as shown by the hydrometer is 1215 and the temperature of the acid 75 deg. Fahr., the correct specific gravity would be 1220.</p> <p>The above rule, while not absolutely correct, is sufficiently correct for all practical purposes, and we give below a table showing the alteration in specific gravity at various temperatures of sulphuric acid of specific gravity 1210 at 60 deg. Fahr.</p> <table border="1" style="margin: 10px auto; border-collapse: collapse;"> <caption>SULPHURIC ACID OF SPECIFIC GRAVITY 1210 AT 60° FAHR. WOULD READ ON THE HYDROMETER AS BELOW.</caption> <thead> <tr> <th>1210 at 95 degrees Fahr.</th> <th>1210 at 60 degrees Fahr.</th> </tr> </thead> <tbody> <tr><td>1201 .. 87 .. ..</td><td>1209 .. 63 .. ..</td></tr> <tr><td>1202 .. 84 .. ..</td><td>1210 .. 60 .. ..</td></tr> <tr><td>1203 .. 81 .. ..</td><td>1211 .. 57 .. ..</td></tr> <tr><td>1204 .. 78 .. ..</td><td>1212 .. 54 .. ..</td></tr> <tr><td>1205 .. 75 .. ..</td><td>1213 .. 51 .. ..</td></tr> <tr><td>1206 .. 72 .. ..</td><td>1214 .. 48 .. ..</td></tr> <tr><td>1207 .. 69 .. ..</td><td>1215 .. 45 .. ..</td></tr> </tbody> </table> <p><small>NOTE.—In taking the temperature of the acid a thermometer constructed entirely of glass must be used.</small></p>	1210 at 95 degrees Fahr.	1210 at 60 degrees Fahr.	1201 .. 87 .. ..	1209 .. 63 .. ..	1202 .. 84 .. ..	1210 .. 60 .. ..	1203 .. 81 .. ..	1211 .. 57 .. ..	1204 .. 78 .. ..	1212 .. 54 .. ..	1205 .. 75 .. ..	1213 .. 51 .. ..	1206 .. 72 .. ..	1214 .. 48 .. ..	1207 .. 69 .. ..	1215 .. 45 .. ..	<p><b>Buckling and Sulphation of Plates</b> Buckling and sulphation of the plates will not occur if the cells are properly worked. It may be due to undercharging, overcharging, or to the cells being left for a considerable period uncharged. Cells containing buckled and sulphated plates should be attended to as soon as possible, but no attempt must be made to straighten such plates until they have been brought into healthy condition again, which can be effected by giving the cells a prolonged charging at half the normal rate. Before carrying out this treatment the cells must be examined and care taken to see that the positive plates are not in contact with the negatives and that there are no contacts between the plates due to scale. If the buckling has resulted in the positive plates coming into contact with the negatives the plates should be carefully forced apart by means of a strong tapered ebonite strip and temporary additional separators or narrow ebonite strips inserted to keep the plates apart. All scale making contact between the plates should also be removed. After the plates have been brought into healthy condition they can be straightened by pressure carefully applied after inserting clean wooden blocks of the proper thickness between them. Any attempt to straighten badly buckled and sulphated plates before treatment as described may result in breakage.</p> <p><b>Undercharged Cells</b> In undercharged cells the positive plates will be found unhealthy in colour (light brown instead of chocolate) and feel harsh to the touch when rubbed. The specific gravity of the acid will be low.</p> <p><b>Overcharged Cells</b> In overcharged cells the positive plates will be a very dark chocolate colour approaching black, and a spongy lead deposit may be found on the surface and edges of the negative plates, which will appear dark slate in colour.</p>
1210 at 95 degrees Fahr.	1210 at 60 degrees Fahr.																	
1201 .. 87 .. ..	1209 .. 63 .. ..																	
1202 .. 84 .. ..	1210 .. 60 .. ..																	
1203 .. 81 .. ..	1211 .. 57 .. ..																	
1204 .. 78 .. ..	1212 .. 54 .. ..																	
1205 .. 75 .. ..	1213 .. 51 .. ..																	
1206 .. 72 .. ..	1214 .. 48 .. ..																	
1207 .. 69 .. ..	1215 .. 45 .. ..																	
	<small>Continued overleaf</small>																	

All repair and maintenance work to electric lighting systems was originally the responsibility of the local Carriage & Wagon staff, but in 1929 the CME Department took responsibility for all the electrical equipment and opened a central workshop (Shop No.5) at Swindon. All new carriage lighting equipment was subjected to acceptance tests here, in addition to the repair and refurbishment of dynamos and the cleaning, reconditioning and recharging of individual accumulator cells as well as complete batteries. The monthly tests on cells and topping-up remained a local responsibility.

## Storage of Suburban Coach Sets

Initially local passenger services in Birmingham were catered for by trains composed of four and six wheeled short coaches. Steam Rail Motors (SRM's) supplemented by Auto-Trailer coaches, were introduced in 1908 to develop the passenger traffic on the newly opened North Warwickshire Line from Tyseley to Stratford-upon-Avon.

The gradual quadrupling of the main line between Moor Street and Olton, allowed a suburban service to be developed on this line. With new stations in the newly developed suburbs, longer passenger trains with greater capacity were introduced to Birmingham by the Great Western Railway in 1911. These four trains were each comprised of a four coach set (designated B sets) with seating for 64 x 1<sup>st</sup> class and 220 x 3<sup>rd</sup> class passengers. Each coach was fifty-seven feet long on two four-wheeled bogies and had electric lighting powered from a Leitner-Lucas system in the Brake vehicles. Designed for moving large numbers of people over relatively short journeys, they had no corridor, gangway or toilet facilities. At either end of the train was a small compartment for the guard, which contained a brake. This meant the coach set did not need to be turned around for the return journey.

By 1913 the usage of SRMs had peaked. They had done their job and passenger numbers now outstripped their capacity. As the SRM's were relocated, four more four coach sets (designated A sets) were introduced using longer seventy foot coaches. Each of these sets had seating accommodation for 80 x 1<sup>st</sup> class and 280 x 3<sup>rd</sup> class passengers. In 1922 four more B sets arrived. These were the first to be provided with electric lighting from a Leitner-Rotax system.

With three extra sidings laid down in Tyseley carriage sidings during 1924, the main influx of coaches occurred in 1925. That year another fourteen B sets were added to the Birmingham coach stock. These were modern metal panelled coaches with bow-ends and no toplights. Half of these had fixed close-coupling arrangements, which dispensed with the buffering between coaches in an attempt to shorten the length of the train. The passenger demand was such that often two pairs of B sets were operated together as a single eight coach train at peak times.

The total number of B sets allocated to the Birmingham Division again doubled between 1927 and 1930, when another twenty-six new B sets arrived. Then finally in 1932, as the first of three five-coach (designated C sets) arrived, six of the oldest B sets were relocated.

The following list gives the details of all the Suburban coach sets known to have been operating in Birmingham Division in early 1932:

Notes:

The words 'BIRMINGHAM DIVISION' and the Set No. was painted on the ends of the brake vehicles.

First digit in running number indicates coach type – 1, 2, 3, 4 or 5 = 3<sup>rd</sup> class coach, 6 or 7 = composite (multi-class) coach.

Letter prefix of coach diagram number indicates coach type C = All 3<sup>rd</sup> class coach, D = 3<sup>rd</sup> class with Brake, E = Composite.

\* indicates running number is missing from original NRM document.

<sup>e</sup> indicates coach was fitted with 'Earls' Electric Lighting System.

### Birmingham Division Suburban trains - 4 coach (A & B sets)

Set no.	Coach running numbers				Notes	Date Built	Brake 3 <sup>rd</sup>		Composite	
							Lot No.	Dia.	Lot No.	Dia.
1	2388	2389	6662	6683	replaced 1932	May 1911	1188	D49	1187	E89
2	2390	2391	6568	6604	replaced 1932					
3	2392	2393	6664	6665	replaced 1932					
4	2394	2395	6596	6597	replaced 1932					



## Storage of Saloons

There were thirteen saloons allocated to the Birmingham Division in 1910 and it is believed that they were stored in Tyseley Carriage Sidings when not in use. Individual saloons were available for hire by groups and parties, and they would be attached to timetabled passenger trains. To hire a saloon coach, the journeys must exceed 50 miles and required a minimum number of fares depending upon the saloon type; four fares for an invalid or family saloon, seven fares for a First Class Saloon and ten fares for a Third class saloon. Travel on other railway company's lines was possible as some saloon coaches were fitted with both Westinghouse and Vacuum brakes, but such travel arrangements attracted additional charges. The details of the individual Saloons stationed at Birmingham Division in 1910 are provided in the following table:

Running Number		Description	No. Wheels & Roof type	Dimensions	Dia No.	Lot No.	Construction Date	Disposal
New	Pre1907							
9065	507	Family Carriage	4 Clerestory	31'0"x 8'0"	G42	304	1884	Converted to Parcel Van
9034	230	Family Carriage	8 Clerestory	45'6"x 8'6"	G32	924	November 1899	
9004	11	1st Class Saloon	4 Clerestory	27'0"x 8'0"	G17	543	August 1890	
9052	488	1st Class Saloon	6 Single Arc	29'0"x 7'6"	n/a	28	1870	
9202	34	Nondescript Saloon	6	31'0"x 8'0"	G27		1887	Converted to Milk & Fruit Van (O14)
9310	2504	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G19	632	May 1892	Condemned 1932
9311	2505	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G19	632	May 1892	Condemned 1935
9336	2530	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G20	774	May 1896	Condemned 1933
9337	2531	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G20	774	May 1896	Condemned 1933
9349	2543	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G20	824	December 1896	Condemned 1933
9359	2553	3rd Class Saloon	6 (3 centre)	31'0"x 8'0"	G20	888	August 1898	Condemned 1934
9365	2597	3rd Class Saloon	8 Clerestory	46'6"x 8'6"	G18	984	December 1901	Ambulance Coach
9366	2598	3rd Class Saloon	8 Clerestory	46'6"x 8'6"	G18	984	December 1901	Ambulance Coach

All of these saloons are identified as having incandescent oil-gas lighting in 1920. The two newest saloons (Nos.9365 & 9366) were withdrawn during the First World War for conversion into Ambulance coaches. They were returned to the Great Western Railway after the war and rebuilt as nondescript saloons in 1921.

According to a January 1928 lecture on 'Great Western Passenger Train Special Traffic' the use of Saloon coaches had significantly declined and most of the 6 wheeled saloon coaches were condemned in the 1930's. Traffic remained sufficient however for a number of new eight wheeled bogie saloons to be built and one of these (W9110W) was photographed at Tyseley Carriage Sidings in the 1950's, sporting British Railways blood and custard livery. This was a Great Western Railway fifty-eight foot long, third class brake saloon to diagram G58. Ten of these saloons were completed at Swindon Works in May 1929, under build lot 1400. They were given running numbers 9101 to 9110. These saloons could seat forty-four passengers in two open saloon compartments (with inward facing bench seats) and one standard



compartment. There was a full length side corridor, two lavatories and a small guard's compartment with brake. They were built for private hire and excursion work, but the open arrangement meant that they received a new lease of life as brake thirds in the 1950s. All were condemned by 1962, with one surviving (No.9103) as part of the Westwood Television exhibition train before being preserved at the Severn Valley Railway.

### Storage of other Specialist vehicles

The Carriage and Wagon Department also stored non-passenger stock, which was rated for operation in passenger trains. These were termed 'Brown Vehicles' due to the brown livery that they carried. The lettering was a yellow ochre colour. To be rated to operate in passenger trains the stock had to have; oil axle boxes, vacuum brakes (or through brake piping) and an acceptable wheelbase. The minimum wheelbase length was fifteen feet.

The types of rolling stock included:

Flat wagons for transporting carriages or road vehicles (telegraphic codes - MAYFLY & SCORPIAN)


Covered box wagons for transporting horses and prize cattle (telegraphic codes – PACO & BEETLE)

Covered wagons for transporting road vehicles (telegraphic code - PYTHON)

Covered wagons originally designed for transporting milk churns (telegraphic code - SIPHONS), but later used for express delivery of parcels and newspapers

Well wagons for transporting trams and buses (telegraphic code - HYDRA).

A well wagons rated to carry a load of 15ton (No.42194) is in the Tyseley collection. This particular wagon was built at Swindon Works in 1917 to diagram G22. The Great Western Railway diagram drawing of this wagon is attached:

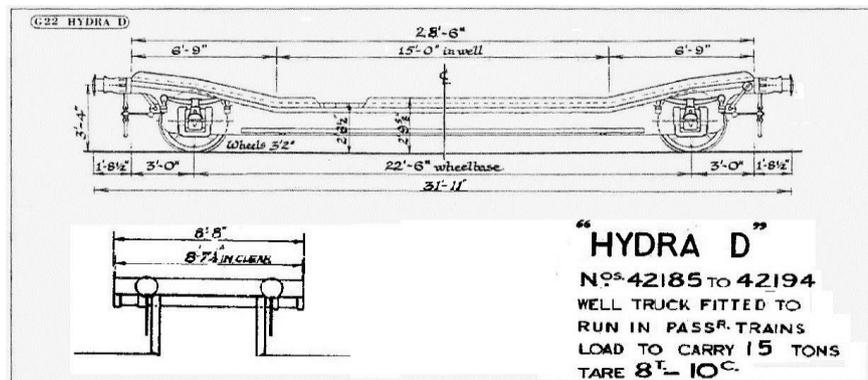

### Changes in the Carriage Siding during the last fifty years

Various additions to the track layout around the carriage sidings were gradually removed in the early 1970's. This included the wagon repair and cripple sidings, which had been accessed from the down through road. Also connected to the down through road was the Signal & Telegraph Department siding and its removal allowed Ground Frame No.2 at the southern approach to the carriage sidings to be taken out of use. In February 1971 a pair of sidings were re-laid on the track-bed of the wagon repair sidings and these have been used as private sidings for the waste contractor and scrap metal dealer Allen Rowland & Co. Ltd.

On 4<sup>th</sup> January 1976, a new connection was laid down at the northern approach and an additional road constructed on the mainline side of the carriage shed. This through siding was on the track-bed of the up and down goods lines which had been taken out of use on 28<sup>th</sup> January 1968. It was brought in to use on 4<sup>th</sup> April 1976 and equipped with a drive-through carriage washer. The following year the carriage shed was demolished and the sidings were reconstructed. Twelve parallel through roads were provided with 300 metre covered aprons and overhead lighting gantries to facilitate night-time working. Half of the aprons were provided with refuelling points. The twelve through roads were complimented by a two road maintenance shed, while three other sidings were retained for storage. The layout of the carriage sidings can be seen in this recent aerial image of the site:



In 2007, an underframe washer was installed to complement the drive-through carriage washer. In 2010, Network Rail funded the installation of a replacement drive-through carriage wash plant on a dead-end siding next to the junction on the other side of Tyseley station. The wash plant equipment was reported as costing £1.6m. It has soft flail cleaners with three wash settings (no wash, wash detergent and wash-acid). The used water is collected and filtered for recycling. When introduced Tyseley based trains were required to be washed every 48 hours. The thirty year old wash plant was removed and the wash road became another storage siding. The carriage sidings continue to be used for storage, interior cleaning, battery charging and maintenance of the local region's diesel multiple units.



In addition, all the local rolling stock is fitted with controlled emission toilet (CET) retention tanks, so facilities are also provided to hygienically flush and rinse these. The waste water is treated before disposal. There are also facilities for filling the train tanks with clean drinking water. Sand is supplied in sacks for refilling train sand boxes. The sand can be dispensed onto the track adjacent to powered bogies to increase the adhesion of the rolling stock's wheels (to avoid delays from ice or leaves on the line).




## Appendix 1 – Development of Carriage Lighting on the Great Western Railway


Carriage lighting arrangements developed over time, with older systems sometimes being modified, but often remaining in service for the lifetime of the carriage. Initially individual oil lamps were employed, with each compartment's lamp being suspended beneath a chimney in the carriage roof. The individual lamps were lifted out to refill the oil reservoir and to trim the wick at the start of each journey

### Flat Flame Oil-Gas Lighting

In 1884, the Great Western Railway introduced gas lighting in their new London suburban stock. The improvement in illumination was such that in 1898 the Company authorised £20,000 to replace all existing oil lamps with flat flame gas lighting. The gas lights were fed by pipework from a pressurised cylindrical storage reservoir(s) located underneath the carriage floor (see photograph). The

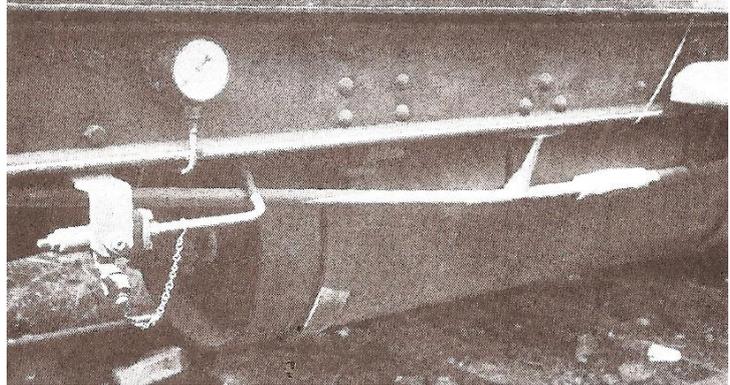

flat flame light fittings were installed in a central clerestory running the length of the coach roof. This allowed the light fittings to be ventilated and concealed them above the compartment ceiling. It also however restricted the position of each light to the centre of the roof, which was not ideal in the recently introduced main-line side-corridor coaches. Oil-gas was used, as this could be compressed (unlike town or coal-gas) for storage in the pressurised cylinders. A gas regulator ensured the gas reaching the lamps was maintained at a constant pressure. The cylinders needed to be regularly refilled and travelling oil-gas tank wagons were regularly dispatched to the carriage depots from the oil-gas producing plants situated at; Stafford Road Locomotive Works, Wolverhampton and the Swindon Locomotive Works.

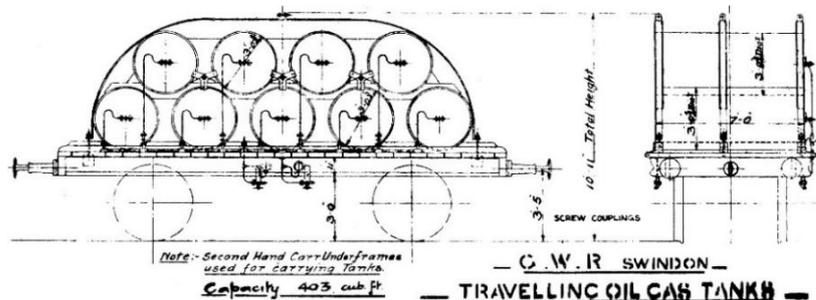


*Official drawing and photograph of a Great Western Railway travelling oil-gas tank wagon (telegraphic code CORDON) to diagram DD4. The photograph was taken on 20<sup>th</sup> February 1939 at the Northwood carriage sidings (located north end of Snow Hill Station). Between March 1903 and January 1933, forty of these wagons were built on the wooden underframes of withdrawn four-wheeled carriages. The nine transverse gas receiving tanks were secured in place with iron straps. These tanks were seven foot long with a three foot diameter and held about 45 cubic feet of oil-gas each. The gas was compressed to 150 psi. Most of these wagon's underframes were renewed in the 1920's and lever brakes fitted.*



## Stone's System of Electric Lighting


In 1890 the Great Western Railway installed its first electric lighting in three Royal Saloons. This was the 'Stone's double battery system'. A dynamo suspended beneath the carriage underframe on a hinged bracket had a belt driven from a pulley-wheel fixed to one of the rotating carriage axles. This meant that the dynamo's output was dependent upon the speed of the train with the output voltage would fluctuating during the journey. The difference between the diameters of the axle pulley-wheel and dynamo shaft meant that the dynamo rotated about three times as fast as the axle and at high speeds the resulting output voltage of the dynamo could over-charge and damage the accumulators. This was resolved by using a cotton drive belt studded with copper rivets and adjusting the tension on the belt such that it slipped on the pulley-wheel at speeds over 12mph. At low speeds the opposite problem occurred, as the dynamo output voltage would be insufficient to power the electric lights in the carriage. This was resolved by powering the carriage lights from one battery of accumulators, while a second battery of accumulators was connected to the dynamo for recharging when the train was moving. Having two sets of batteries. As these early dynamos were non-reversible having two batteries of accumulators arranged with opposite polarities meant one battery could be charged when the train travelled in one direction and the other battery charged on the return journey. An automatic switch was provided to reverse the connections when the train changed direction. The diagram below shows the dynamo arrangement:

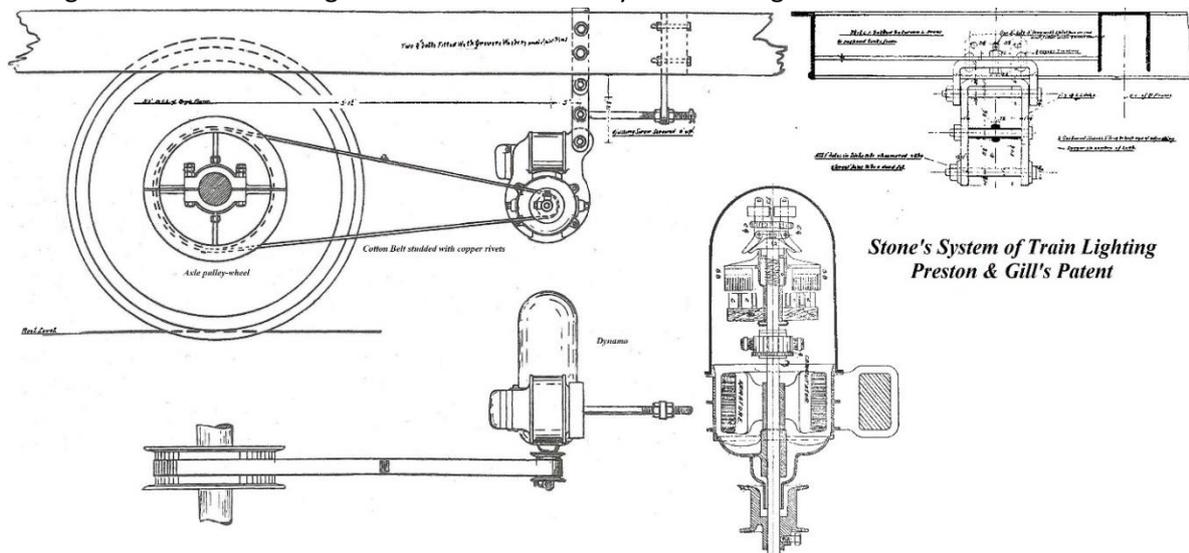

In 1900, the Stones system of electric lighting was installed in ten new main-line coaches destined to form the Ocean Express between London and Milford in Wales. Two sets each comprising; one first class coach (diagram A6), three third class coaches (diagrams C18 & D32) and one Buffet Second Car (diagram H5). In 1904, four new Dining Cars (diagram H8) were also fitted with this system of electric lighting.


## Inverted incandescent Gas Mantle Lighting

In 1886, the incandescent gas mantle was invented and this gave off a bright white light. This was further improved by inverting the mantle to shine the light downwards. In 1905, Mr Riley of the Great Western Railway's Swindon Gasworks reported a trial that he had undertaken. He confirmed that a lamp with an incandescent gas mantle would burn over almost 50% brighter (20 candles) than a conventional oil-gas light, while consuming only a third of the fuel. To address concerns about the fragile nature of the gas mantles in moving carriages, experiments were also undertaken with an installation in a converted coach.

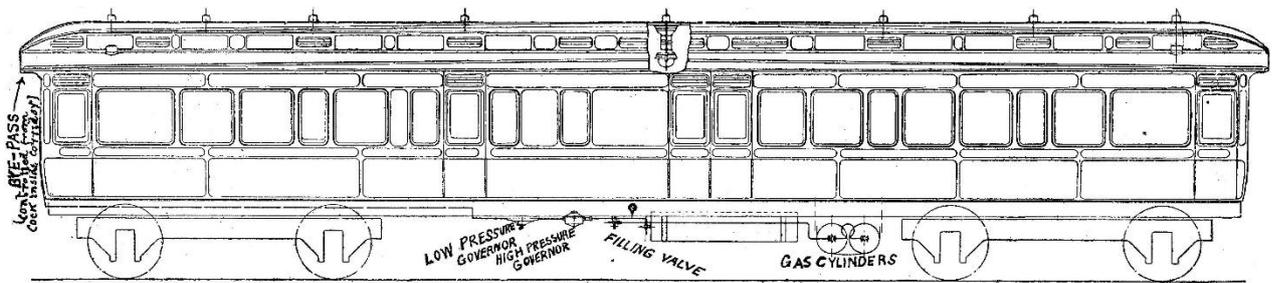

*Drawing showing the position of the principle Gas Lighting components in Director's Saloon No.249 (diagram G3). This coach was ordered on 24<sup>th</sup> August 1894 (Lot 745) and completed at Swindon Works on 22nd October 1894 with conventional oil-gas lighting. It was modified by Mr Riley for the experiments with inverted incandescent gas mantles. By 1910 this saloon was stationed at Old Oak Common and renumbered No.9045.*

These experiments resulted in one mantle requiring replacement after 4,464 route miles and a total of seven mantles requiring replacement after 15,624 miles. Although existing oil-gas lighting installations could be adapted relatively cheaply, the Great Western Railway took the opportunity to fit new burners with a permanently burning pilot (or flash) light. This pilot light was fed from a second small bore pipe to each gas fitting. It was a wasteful arrangement, but allowed an additional valve to be installed in the main gas pipework and this valve provided a single control point for all the lighting in a carriage.

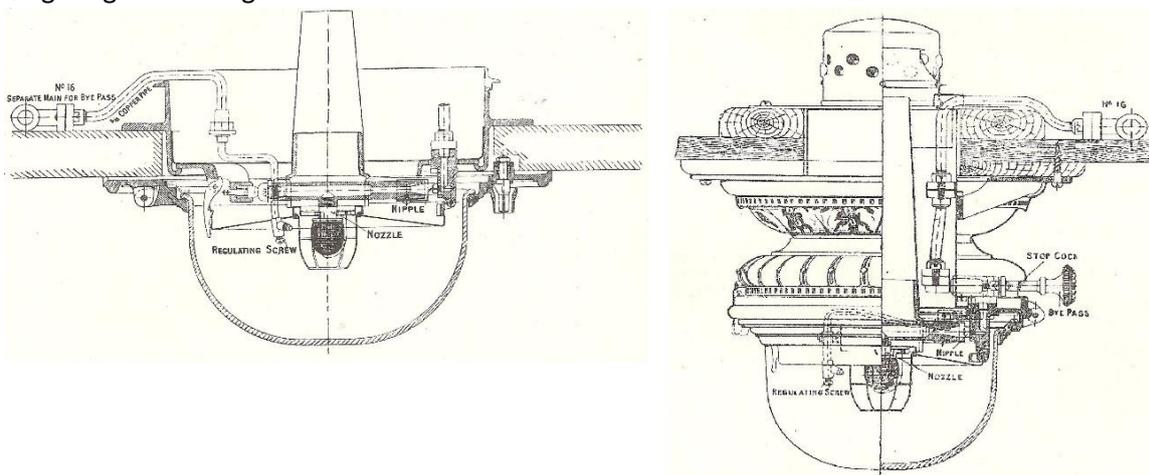

*The drawings show; (1) a conventional Pintsch oil-gas light fitting adapted to allow an incandescent gas mantle to be fitted and (2) a new Pintsch oil-gas light with an incandescent mantle and a separate pilot light supply.*

Although the oil-gas reservoirs under the coaches still needed regular refilling and the individual incandescent gas mantles needed checking after every journey, the main concern with all types of gas lighting was the risk of fire. The first recorded incident involving a fire caused by gas escaping from a carriage lighting system occurred on 2<sup>nd</sup> September 1898. A Midland Railway express was derailed at Wellingborough station by a platform trolley on the track. The report stated: 'The under-framework of the second carriage from the tender took fire, apparently in consequence of an escape of gas from cylinders under the carriage.' All five passenger fatalities were from this third class brake coach, which was reported as being damaged beyond repair. More incidents involving fires from gas lighting equipment continued to occur, with one of the worst happening at Hawes Junction on the morning of Christmas Eve 1910. A Midland Railway express collided with two light engines due to an error by a signalman and pressurised gas cylinders under at least one coach were perforated in the collision. Two coaches were burnt out in the ensuing fire which subsequently spread to another four carriages. Twelve passengers lost their lives, with one passenger trapped by debris being overcome by the smoke and burnt alive.

### Leitner-Lucas System of Electric Lighting

The fire risk turned the public's attitude against gas lighting and in 1909 the Great Western Railway decided to standardise on electric lighting for all their new carriage construction and choose the Leitner-Lucas system.


This decision was helped by the development in 1906 of the tungsten filament lamp. These were introduced to Britain by GEC under the Osram brand. This produced a superior light using only a third of the electrical power required by the original Swan/Edison light bulbs.

The knock on effect was a considerable reduction in the cost of the required electrical equipment. The required capacity of the accumulators was reduced and one dynamo (the most expensive item) could now be used to supply power to up to four coaches. This was called the 'brake vehicle method', as a dynamo was fitted (with a single battery of accumulators) under the brake coach in the train and jumpers between the carriages connected to the lighting wiring in the adjacent coaches.




The Leitner-Lucas system encompassed the latest advances in electrical engineering, which meant the uniformity and polarity of the output voltage could be maintained from the dynamo irrespective of the train's speed or the direction of travel. This was achieved by introducing a second smaller coil on the same shaft as the main dynamo to produce a current opposing that in the main dynamo's magnets. This resulted in the output voltage remained just above 20V when the train was travelling between 16mph and 80mph and this was sufficient to charge the accumulators. Below 16mph an automatic switch disconnected the dynamo from the circuit to prevent power being drained from the accumulators and wasted. A regulator was provided to control the voltage seen at the carriage lights ( $20 \pm 1/2$  Volts). The three photographs below show the three main components of an early Lucas-Leitner system:


(1) Variable reversible Dynamo (attached by a belt to the axle pulley wheel):

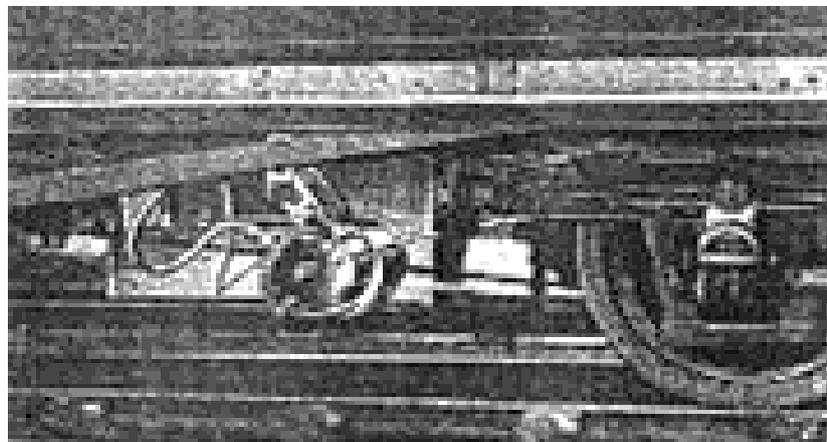

(2) Regulator:


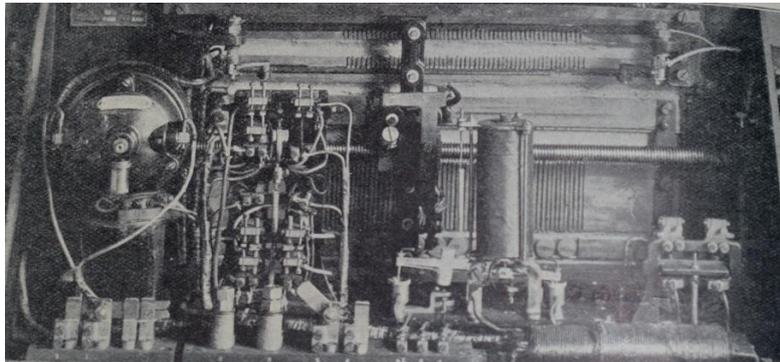


(3) Automatic Switch:

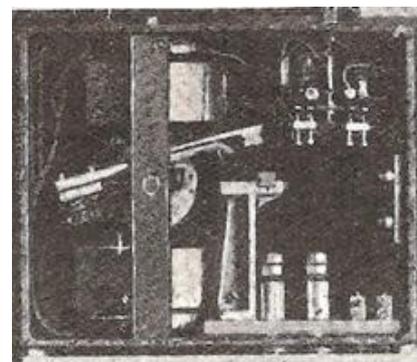

### Leitner-Rotax System of Electric Lighting

When the hard-setting, mouldable insulating material 'bakelite' became available in the early 1920's, the cost of electrical equipment reduced. The brake vehicle lighting method could be discontinued and every coach economically equipped with its own; Leitner-Rotax dynamo, batteries and the associated control equipment. The name Rotax came from a subsidiary of Lucas and was used to differentiate from the earlier Leitner equipment.

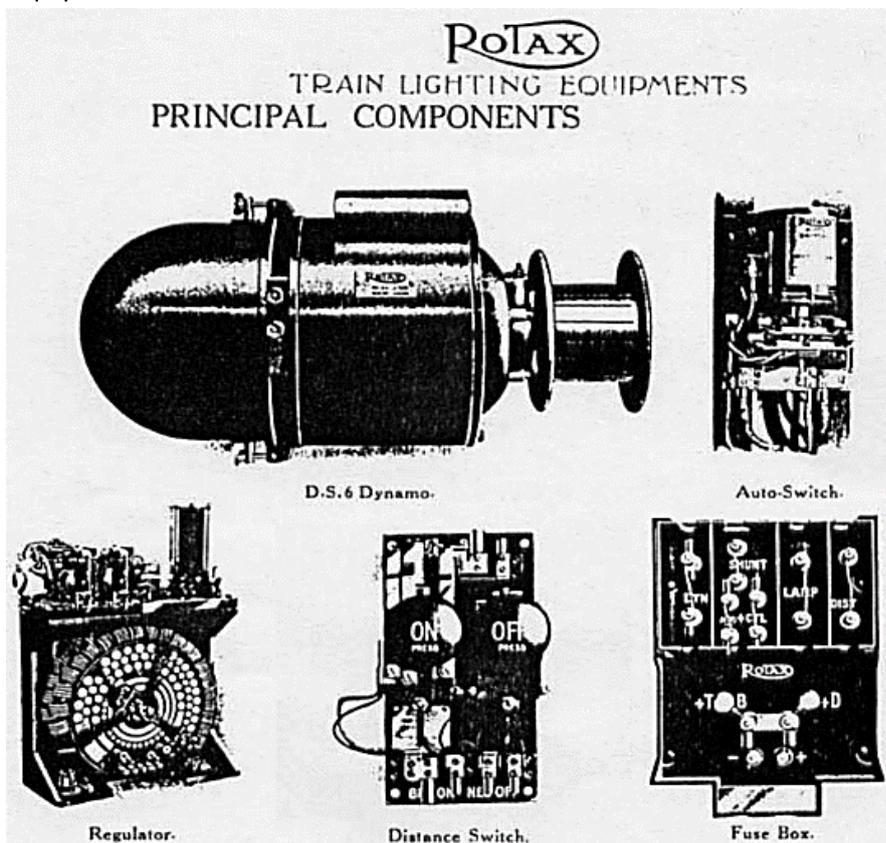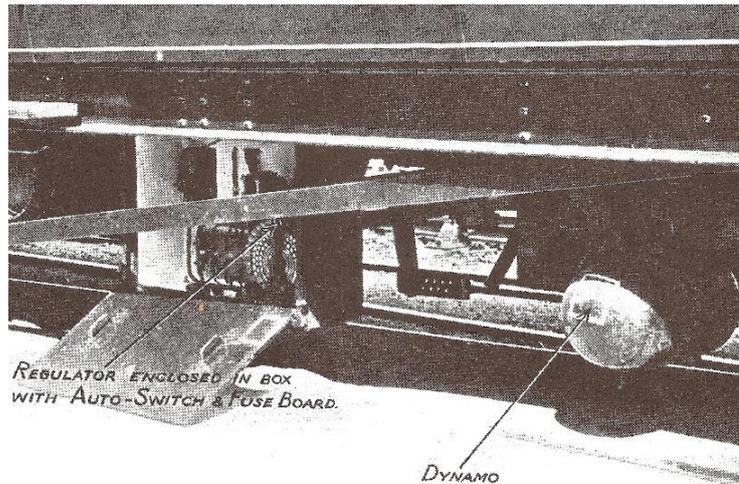

The photograph shows a typical installation under a Great Western Railway coach in 1924.

A contemporary advert shows the use of moulded resin insulating material in the electrical components.

The Leitner-Rotax system continued to be installed on all new coaches built at Swindon Works, until British Railways introduced their own standard.

The table below illustrates the changes in train lighting methods that occurred on Great Western Railway passenger stock. It excludes the 'brown vehicles' (eg horse boxes, etc.), some of which had lighting. The figures are somewhat distorted by the addition of a large number of coaches with a range of lighting arrangements from the various absorbed railways at the Grouping in 1921.

Lighting in Great Western Railway Passenger Coach Stock							
Year	Oil	Oil-Gas		Gas	Electric		
		Flat flame	Incandescent	Acetylene	Stone's	Leitner	Other
1910	58	3664	1526	0	18	257	1 (B&S)
1915	15	1265	3689	0	15	704	1 (BTH)
1920	0	416	4451	0	21	687	0
1925	4	138	4925	12	318	1399	2 (Earls)

The remaining oil, flat flame oil-gas and acetylene systems had all disappeared by 1930, but many coaches with incandescent oil-gas lighting remained, with some retaining their oil-gas lighting until the coaches were withdrawn in the 1950's. The Stone's electric lighting system had by now introduced a reversible dynamo and this was widely used by several railway companies, but on the Great Western Railway these non-standard systems were gradually replaced with the Leitner-Rotax equipment. The removed equipment was reused for lighting in 'brown vehicles'. The two coaches with the 'Earls' electric lighting system were diagram E103 composite suburban coaches (Nos.7913 and 7914). These were both from Birmingham Division B Set No.12, which was built at Swindon Works in March 1922, as part of lot 1282.



Robert Ferris  
Volunteer Archivist for Vintage Trains  
March 2021



### **Bibliography**

The following documents, books and websites have proved useful for researching this article:

- Great Western Railway Plans, Documents, Photographs and Postcards from the Tyseley Archive
- Great Western Railway Magazine – Various years
- Great Western Railway, Service Timetables, Section No. 12 - Various years pre 1921
- Great Western Railway, Service Timetables, Section No. 13 - Various years post 1922
- GWR Mech Inst, Jr Eng Soc pamphlet No.11, Modern Railway Carriages (G Churchward) 1896
- GWR Mech Inst, Jr Eng Soc pamphlet No.23, Steam Heating of Railway Carriages (F Marillier) 1898

Accident Report, Midland Railway - Wellingborough Station (Lt Col H Yorke) Board of Trade 1898  
GWR Mech Inst, Jr Eng Soc pamphlet No.39, Train Lighting by Electricity (F Wait) 1901  
GWR Mech Inst, Jr Eng Soc pamphlet No.44, Carriage and Wagon Rolling Stock (F Marillier) 1903  
GWR Magazine article, GWR Oil-Gas Works , Swindon (E Riley) 1904  
GWR Magazine articles, Train Lighting Methods & Electric Train Lighting and its problems 1905  
GWR Mech Inst, Jr Eng Soc pamphlet No.71, The work of a Running Department (H Simpson) 1906  
GWR Magazine article, New Carriage Shed at Tyseley 1909  
Great Western Railway Circular No1828, 'Steam Heating of Trains' 1909  
Railway Magazine article, The Lighting of Railway Carriages by Incandescent Gas Lamps (G Gill) 1909  
Railway Magazine article, From the Locomotive to the Lamp – The Leitner system (W Parker) 1909  
Great Western Railway, General Appendix to the Rules & Regulations 1910  
Accident Report, Midland Railway – Hawes Junction (Major J Pringle) Board of Trade 1910  
GWR (London) Lecture Soc abstract, Electric Lighting of Railway Carriages (M Tweedie) 1911  
Inst Civil Eng abstract, Electric Lighting of Railway Trains; The Brake Vehicle method (R Smith) 1911  
Train Lighting by Electricity (J.F.L.) Locomotive Publishing Co 1914  
GWR Regulations for the guidance of Train Examiners and Greasers 1920  
GWR Appendix to the Service Timetable Section for Birmingham Division (Section Nos.12 & 14) 1921  
Great Western Railway, General Appendix to the Rules & Regulations 1923  
Great Western Railway Book, The 10:30 Limited (W Chapman) GWR 1923  
History of the Great Western Railway Vols 1 & 2 (E MacDermot) GWR 1927  
GWR (London) Lecture Soc No.214, Concerning Passenger Train Special Traffic (C Rayner-Smith) 1928  
GWR Appendix to the Service Timetable Section for Birmingham Division (Section Nos.13 & 15) 1929  
GWR Magazine article, Swindon Works – The Electrical Shop of the Carriage & Wagon Works 1929  
Pritchett & Gold / EPS pamphlet, Accumulators for Train Lighting  
Inst Mech Eng abstract, Some factors affecting the ridding of coaching stock (A Dymond) 1931  
GWR drawing listing details of photo frames and mirror frames fitted (NRM ID 7716, roll no.316) circa 1932  
Loco Railway Carriage & Wagon Review Supplement, Train Lighting & Heating 1933  
Great Western Railway Book, Cheltenham Flyer (W Chapman) GWR 1934  
Great Western Railway, General Appendix to the Rules & Regulations 1936  
BR Swindon Eng Soc, Outline of Train Lighting System in the Western Region (A Cole & A Struct) 1949  
The Armstrongs of the Great Western (H Holcroft) Railway World 1953  
A pictorial record of Great Western Coaches Part 1 1838 – 1913 (J Russell) OPC 1972  
A pictorial record of Great Western Coaches Part 2 1903 - 1948 (J Russell) OPC 1973  
The North Warwickshire Railway (C Goode) Oakwood Press 1978  
Track Layout Diagrams, Section 30 Banbury to Birmingham (R Cooke)  
Great Western Coaches from 1890 (M Harris) David & Charles 1985  
An Historical Survey of selected GWR Stations, Volume 4 (C Potts) OPC 1985  
British Railway Journal Nos.13 & 16 articles, GWR Coach Lighting (J Lewis) WSP 1986/87  
Locomotive Engineers of the GWR (D Griffiths) Patrick Stephens Ltd (1987)  
Great Western Railway Journal Nos.1 & 2 articles, Cordons (J Lewis) WSP 1992  
Great Western Railway Journal No.5 article, Birmingham Division Suburban Trains (J Lewis) WSP 1993  
HMRS Journal Volume 15 No.5 article, Train Lighting – Gas vs Electric (P Millard) HMRS 1995  
The Story of the North Warwickshire Line (A Bevan) Adland Print & Repro Ltd 2008  
GWR Goods Wagons (A Atkins, W Beard & R Tourret) OPC 2013  
Great Western Railway, Structure Colours 1912–1947 (R North) GWSG 2013  
Great Western Railway Journal Nos.90, 91 & 92 articles, Birmingham Loco (R Potts) WSP 2014  
The Carriage & Wagon Works of the GWR at Swindon (K Gibbs) TJ International 2016  
Tyseley Station and Goods Yard (R Ferris) Friends of Vintage Trains 2020  
Aerial View of Tyseley Carriage Sidings from Google Maps 2020  
Warwickshire Railways Website at [www.warwickshirerailways.com](http://www.warwickshirerailways.com)  
Great Western Study Group Website at [gws.org.uk](http://gws.org.uk)  
Graces Guide Website at [www.gracesguide.co.uk](http://www.gracesguide.co.uk)  
Scottish Railway Preservation Society, Carriage & Wagons Dept Website at [gotopcs.net](http://gotopcs.net)